



### Benefits:

- For cameras up to 30 x 30mm cross section
- Robust construction
- Compact size and
- Small dead weight
- High IP protection class
- Flexible camera positioning
- High chemical resistance
- Vibration-proof mounting
- Dome and Germanium window option
- Camera mount included
- Excellent heat dissipation
- Custom length option



### Technical Details:

<b>Max. Camera Size</b>	30 x 30mm
<b>Max. Lens Diameter</b>	39mm
<b>Inner Length</b>	106mm (XS), 82mm (flat) 146mm (S), 122mm (flat) 176mm (M), 152mm (flat)
<b>Dimensions (w x h) length without cable gland</b>	50 x 50 116mm (XS), 92mm (flat) 156mm (S), 132mm (flat) 186mm (M), 162mm (flat)
<b>Window Aperture</b>	28mm
<b>Standard Window Sapphire</b>	BK7, double sided ARC
<b>Germanium</b>	Order Number: 20.000.041
<b>Window Seal</b>	Hytrel
<b>Protection Class</b>	IP66 (Nema 4)

<b>Weight (incl. camera mount)</b>	Ca. 350g (XS), 280g (flat) Ca. 420g (S), 350g (flat) Ca. 465g (M), 395g (flat)
<b>Enclosure Material</b>	Anodized Aluminum
<b>Enclosure Seals</b>	NBR
<b>Cable Gland Aperture (max. connector size)</b>	20mm (Rear Wall A) 16.5mm (Rear Wall B) 20.5mm (Rear Wall C)
<b>Cable Diameter</b>	4-6.5mm (Rear Wall B) Self drilling (Rear Wall C)
<b>Cable Gland Seal</b>	TPE



The camera mount guarantees excellent heat dissipation




Order Numbers:

Product ID	Camera Height	Enclosure Type	Rear Wall/Front Lid		Length
2	29 = 2.9 30 = 3.0	0	Front Lid		XS: <b>080</b> S: <b>120</b> M: <b>150</b>
			standard	flat	
			0 Rear Wall A	5	
			1 Rear Wall B	6	
2 Rear Wall C	7				
Surcharge Colibri Custom Length: <b>20.000.045</b>			<b>Order separately:</b> Surcharge cam mount Flir Firefly: <b>20.000.083</b>		



Dome Window for Fisheyes

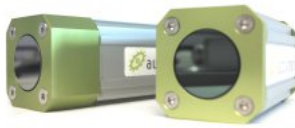

Germanium Windows for IR cameras




Special Mount for Flir FireFly

Accessories:

Product	Image	Order No.	Product	Image	Order No.	Product	Image	Order No.
Air Nozzle		50.100.023	28mm PA Tube		20.000.006	Mounting Kit 27		5.270.000
Deflection Mirror 90°		20.020.004 + 10.062.979	Mounting Kit 21		5.210.000	Mounting Kit 28		5.280.000
30/40mm Bracket		10.062.979	Mounting Kit 22		5.220.000	Mounting Kit 29		5.290.000
Surcharge Dome		20.000.092	Mounting Kit 24/24m		5.240.000 5.240.000m			



### Front Lid

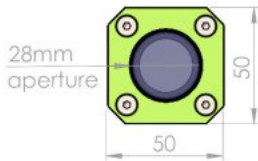


max. 39mm lens diameter

### Profile



29


### Dome Lid




max. 25mm lens diameter

20


### Size XS

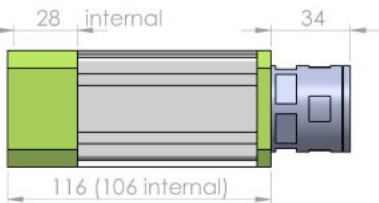

### Size S

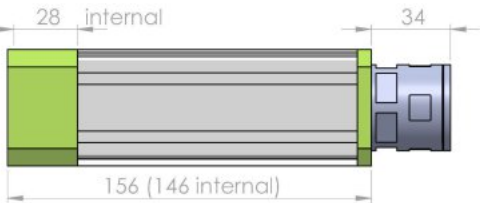


### Rear Wall A




max. 20mm connector

### Size M

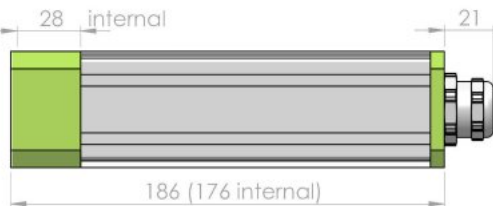


### Rear Wall B




max. 13.5mm connector  
4 - 6.5mm cable

### Size M

### Flat Front Lid

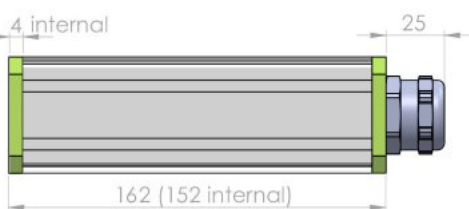

### Rear Wall C



max. 20mm connector  
several cables

