Benefits:

- **For cameras up to 40 x 40mm cross section**
- **Robust construction**
- **Compact size**
- **High IP protection class**
- **Flexible camera positioning**
- **High chemical resistance**
- **Vibration-proof mounting**
- **Camera mount included**
- **Excellent heat dissipation**
- **Special version for Tamron MP3010**



Technical Details:

Max. Camera Size (w x h)	40 x 40mm 29 x 47mm
Max. Lens Diameter	55mm (in profile) 52mm (in front lid)
Inner Length	94 (Size XS) 136 (Size S) 189 (Size M) 219 (Size L)
Enclosure Dimensions (w x h x l, without cable gland)	66 x 66 x 108mm (Size XS) 66 x 66 x 150mm (Size S) 66 x 66 x 203mm (Size M) 66 x 66 x 233mm (Size L)


Window Aperture	45mm
Standard Window **IR Mirror** **Saphire** **Germanium** **Acrylic, uncoated** **Acrylic, double sided ARC**	BK7, double sided ARC Order No.: 20.000.010* Order No.: 20.000.016* Order No.: 20.000.017* Order No.: 20.000.058* Order No.: 20.000.029*
Window Seal	EPDM

Protection Class	IP66 (Nema 4) IP67 (Nema 6)

*Please ask for the product number of the spare part

Weight (without camera mount)	Approx. 660g (Size XS) Approx. 850g (Size S) Approx. 1070g (Size M) Approx. 1200g (Size L)
Enclosure Material	Anodized Aluminum
Enclosure Seals	NBR

Cable Gland Aperture (max. connector size)	22mm (Rear Wall A) 13.5mm (Rear Wall B) 16.5mm (Rear Wall B) 26.5mm (Rear Wall C)
Cable Diameter	4-6.5mm (Rear Wall B) Self drilling (Rear Wall C)
Cable Gland Seal	TPE

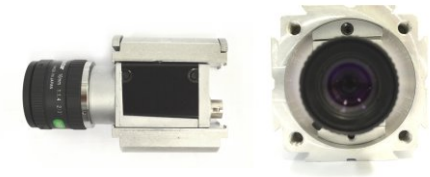

The mount guarantees excellent heat dissipation

autoVimation by Exaktera
sales@autovimation.com +49 (0) 151 41695845 +49 (3681) 45519-0



Front Lid Profile XS Profile S Profile M Profile L RearWall A RearWall B RearWall C RearWall D

Order Numbers:


Salamander S für Tamron MP3010					**100.010.602**
Product ID	**Camera Height**	**Camera Lenght**	**Enclosure Type**	**Rear Wall Type**	**Length**
2	29: **0** | 30: **1** | 31: **2** 32: **3** | 33: **4** | 34: **5** 35: **6** | 36: **7** | 38: **8** 40: **9**	< 50mm: **3** < 74mm: **5** < 92mm: **7**	**1**	A: **0** B: **1** C: **2** D: **3**	XS: **070** S: **139** M: **192** L: **222**

Example: 20.312.192 | Salamander M | camera height 29mm | camera length <50mm | rear wall C


Accessories:

Product	Image	Order No.	Product	Image	Order No.	Product	Image	Order No.
Air Nozzle		50.100.025	Cooling Module		60.100.010	Mounting Kit 2		5.020.000
2" Wind Curtain		50.100.010	El. Heating Plate		70.100.018	Mounting Kit 6		5.060.000
Tube for W. Curtain		50.100.017	Orca Adapter		15.030.001	Mounting Kit 7		5.070.000
Pneumatic Shutter		50.200.010	Sun Roof Size S, M, L		20.010.001 20.010.002 20.010.003	Mounting Kit 9		5.090.000
Deflection Mirror 90°		20.020.004	LaserMount 19 or 20mm		14.100.019 14.100.020	Mounting Kit 10		5.100.000
30/60mm Extension		15.015.030 15.015.060	Corrugated Tube 28mm		20.000.006	Mounting Kit 15		5.150.000
60mm Side Exit		15.015.061	Mounting Kit 1		5.010.000	Mounting Kit 16m		5.160.000m
Position Ring		20.020.003				Mounting Kit 17m		5.170.000m


Front Lid

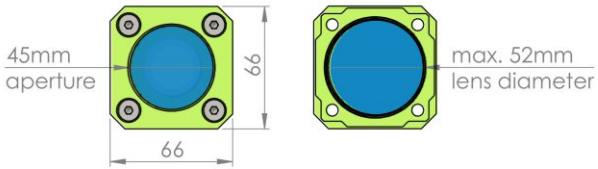


Profile




Size XS



Rear Wall A

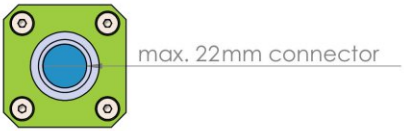


Size S

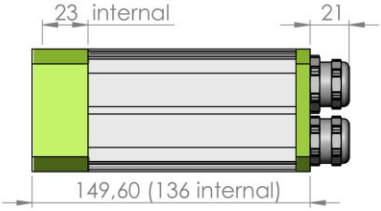

Rear Wall B




Size M

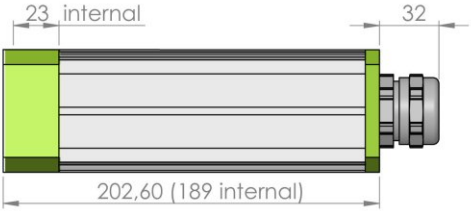

Rear Wall C



Size L

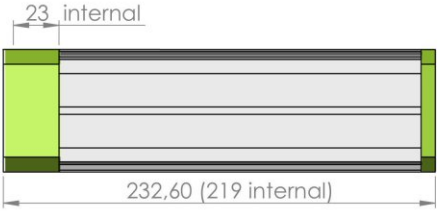

Rear Wall D

